



WOODWORKING GLUES



titebond.com | 800.347.4583




TITEBOND III ULTIMATE

Our fastest growing formula, it is considered the best wood glue ever! Highly recognized by professionals and DIYers for its superior strength, longer open time and waterproof bond.

- Exterior/Interior projects
- Passes ANSI/HPVA Type I – Waterproof
- Lower application temperature
- Water cleanup – Non-toxic

| size | item # | units/case | cases/pallet |
|--------------------|--------|------------|--------------|
| 1.25 oz Bottle | 1411 | 50 | 160 |
| 1.25 oz Bottle | 18000 | 30 | 150 |
| 4 oz Bottle | 1412 | 12 | 270 |
| 8 oz Bottle | 1413 | 12 | 160 |
| 16 oz Bottle | 1414 | 12 | 100 |
| Quart Bottle | 1415 | 6 | 88 |
| Gallon Jug | 1416 | 2 | 63 |
| 2.15 Gallon Projug | 14109 | 1 | 60 |
| 5 Gallon Pail | 1417 | 1 | 24 |
| 55 Gallon Drum | 1418 | 1 | 4 |

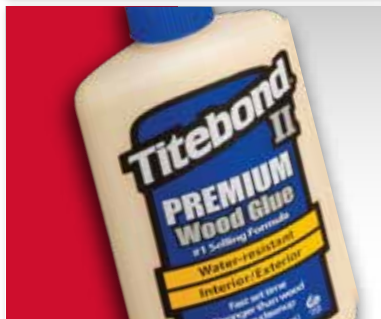

TITEBOND II PREMIUM

Our most popular wood glue! A strong initial tack, shorter assembly time and excellent water resistance make it the ideal choice for interior/exterior woodworking and home repairs.

- Interior/Exterior projects
- Passes ANSI/HPVA Type II – Weatherproof
- FDA-approved for indirect food contact
- Water cleanup – Non-toxic

| size | item # | units/case | cases/pallet |
|-----------------|--------|------------|--------------|
| 1.25 oz Bottle | 5001 | 50 | 160 |
| 4 oz Bottle | 5002 | 12 | 270 |
| 8 oz Bottle | 5003 | 12 | 160 |
| 16 oz Bottle | 5004 | 12 | 100 |
| Quart Bottle | 5005 | 6 | 88 |
| Gallon Jug | 5006 | 2 | 63 |
| 2.15 Gal Projug | 50009 | 1 | 60 |
| 5 Gallon Pail | 5007 | 1 | 24 |
| 55 Gallon Drum | 5008 | 1 | 4 |




TITEBOND II PREMIUM EXTEND

A slower-setting version of TITEBOND II PREMIUM, it is ideal for complex woodworking assemblies.

- Longer open time
- Unaffected by finishes
- Water cleanup – Non-toxic

| size | item # | units/case | cases/pallet |
|----------------|--------|------------|--------------|
| 16 oz Bottle | 4134 | 12 | 100 |
| Gallon Jug | 4136 | 2 | 63 |
| 5 Gallon Pail | 4137 | 1 | 24 |
| 55 Gallon Drum | 4138 | 1 | 4 |

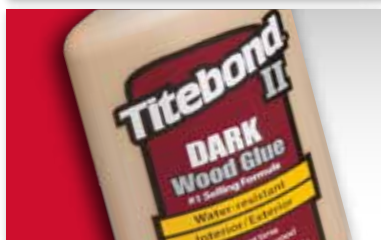

TITEBOND II PREMIUM DARK

A dyed version of TITEBOND II PREMIUM, it is ideal for darker wood species such as walnut, mahogany and cherry.

- Cures to a dark brown glue line
- Fast set time
- Water cleanup – Non-toxic

| size | item # | units/case | cases/pallet |
|----------------|--------|------------|--------------|
| 8 oz Bottle | 3703 | 12 | 160 |
| 16 oz Bottle | 3704 | 12 | 100 |
| Gallon Jug | 3706 | 2 | 63 |
| 5 Gallon Pail | 3707 | 1 | 24 |
| 55 Gallon Drum | 3708 | 1 | 4 |



TITEBOND II PREMIUM FLUORESCENT

A fluorescent dyed version of TITEBOND II PREMIUM that enables easy detection and removal of dried glue before finishing.

- Visible under black light systems
- Fast set time
- Water cleanup – Non-toxic

| size | item # | units/case | cases/pallet |
|----------------|--------|------------|--------------|
| Gallon Jug | 2316 | 2 | 63 |
| 5 Gallon Pail | 2317 | 1 | 24 |
| 55 Gallon Drum | 2318 | 1 | 4 |



TITEBOND ORIGINAL

The industry standard! Recognized as a superior-strength, high quality formula for general woodworking applications. It has been the preferred choice of professional woodworkers for over 60 years.

- Interior projects
- Strong initial tack
- Excellent sandability
- Water cleanup – Non-toxic

| size | item # | units/case | cases/pallet |
|--------------------|--------|------------|--------------|
| 4 oz Bottle | 5062 | 12 | 270 |
| 8 oz Bottle | 5063 | 12 | 160 |
| 16 oz Bottle | 5064 | 12 | 100 |
| Quart Bottle | 5065 | 6 | 88 |
| Gallon Jug | 5066 | 2 | 63 |
| 2.15 Gallon Projug | 50609 | 1 | 60 |
| 5 Gallon Pail | 5067 | 1 | 24 |
| 55 Gallon Drum | 5068 | 1 | 4 |




DOWELING & DOWELING LV

High quality formulas specifically designed for use with automated doweling equipment. Allows appropriate flow through machine feed lines.

- Two viscosities for better results
- Fast set time
- Translucent glue line
- Water cleanup – Non-toxic

| size | item # | units/case | cases/pallet |
|---------------------------------------|--------|------------|--------------|
| 5 Gallon Pail Standard (1,500 cps) | 2207 | 1 | 24 |
| 5 Gallon Pail Low Viscosity (140 cps) | 3817 | 1 | 24 |

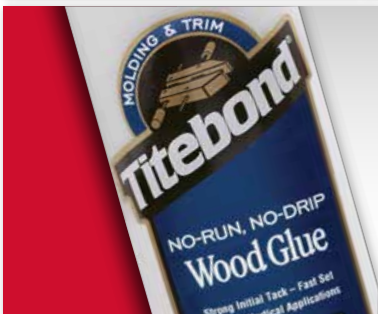


NO-RUN, NO-DRIP

Thicker formula is ideal for vertical applications like finish and trim, moldings, window casings and more. Provides a strong initial tack, fast set and dries clear.

- Excellent bond strength
- Fills small cracks & gaps
- Ideal for bonding end grain
- Water cleanup – Non-toxic

| size | item # | units/case | cases/pallet |
|--------------|--------|------------|--------------|
| 16 oz Bottle | 2404 | 12 | 100 |

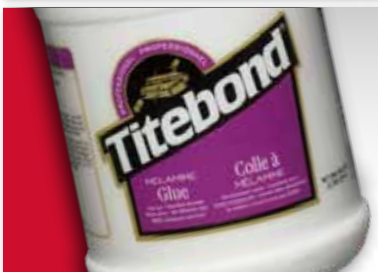

MELAMINE

Designed for bonding wood-based products to synthetic materials, including melamine, vinyl and HPL. Offers a long open time, strong initial tack, excellent strength and clear glue line.

- Strong initial tack
- Thicker formula – No-run
- Dries clear

| size | item # | units/case | cases/pallet |
|----------------|--------|------------|--------------|
| 16 oz Bottle | 4014 | 12 | 100 |
| Gallon Jug | 4016 | 2 | 63 |
| 5 Gallon Pail | 4017 | 1 | 24 |
| 55 Gallon Drum | 4018 | 1 | 4 |




SUPER

A professional-quality formula that offers superior heat-resistance and longer assembly time. It is ideal for edge and face gluing on panels, squares and other wood components.

- Strong initial grab
- Versatile formula
- Longer working time
- Water cleanup – Non-toxic

| size | item # | units/case | cases/pallet |
|----------------|--------|------------|--------------|
| 5 Gallon Pail | 5077 | 1 | 24 |
| 55 Gallon Drum | 5078 | 1 | 4 |

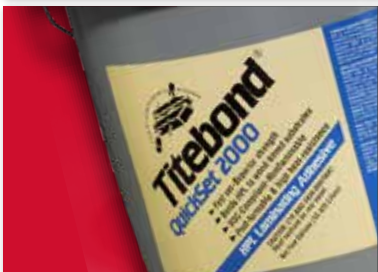

QUICK SET 2000

Bonds HPL to wood-based substrates. Can be used in pinch roll and dead stacking, continuous heated panel systems or limited lay-up time cold press operations.

- Fast set – Superior strength
- Excellent sandability
- Post-formable & high heat resistance

| size | item # | units/case | cases/pallet |
|--------------------|--------|------------|--------------|
| 5 Gallon Pail | 61867 | 1 | 24 |
| 496 lbs Metal Drum | 61868 | 1 | 4 |




COLD PRESS HPL

High-performance alternative to contact cement for large scale flat laminating. Offers excellent strength and moderate speed of set.

- Strong bond – Fast grab
- No corrosive fumes
- Dries translucent
- Water cleanup & non-toxic

| size | item # | units/case | cases/pallet |
|----------------|--------|------------|--------------|
| 5 Gallon Pail | 4617 | 1 | 24 |
| 55 Gallon Drum | 4618 | 1 | 4 |

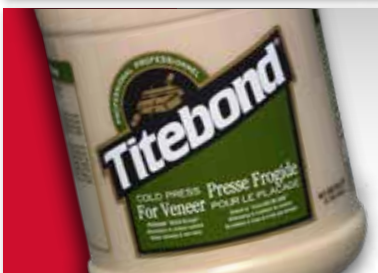

COLD PRESS VENEER

For large-scale bonding of veneers to flat surfaces. Excellent strength, moderate speed of set.

- Prevents bleed-through
- Dries translucent
- Water cleanup – Non-toxic

| size | item # | units/case | cases/pallet |
|----------------|--------|------------|--------------|
| Quart Bottle | 5175 | 6 | 88 |
| Gallon Jug | 5176 | 2 | 63 |
| 5 Gallon Pail | 5177 | 1 | 24 |
| 55 Gallon Drum | 5178 | 1 | 4 |



INSTANT BOND

Designed specifically for wood, but offers excellent adhesion on a wide range of materials. Use alone or with an accelerator for even faster set times.

- Eliminates clamping
- Superior bond strength
- Impact-resistant
- No-clog applicator

THIN VISCOSITY

Fastest assembly time of 5 seconds and an initial cure speed of 3 seconds. It is ideal for repairing hairline cracks and small defects in wood, as well as repairing loose veneer edges. It can also be used as a finish.

| size | item # | units/case | cases/pallet |
|-------------|--------|------------|--------------|
| 2 oz Bottle | 6201 | 15 | 210 |
| 4 oz Bottle | 6202 | 10 | 270 |

MEDIUM VISCOSITY

Offers an assembly time of 7 seconds and an initial cure speed of 5 seconds. In addition to typical bonding applications, it is ideal for filling knots and voids in wood, adhering pen tubes to blanks for pen turning applications, and for soaking end-grain to prevent splitting.

| size | item # | units/case | cases/pallet |
|-------------|--------|------------|--------------|
| 2 oz Bottle | 6211 | 15 | 210 |
| 4 oz Bottle | 6212 | 10 | 270 |

THICK VISCOSITY

Offers an assembly time of 10 seconds and an initial cure speed of 8 seconds. It is ideal for bonding end-grain in a miter joint application, quick assembly of jigs and fixtures, adhering turning blocks to scrap blocks on a faceplate for immediate use.

| size | item # | units/case | cases/pallet |
|-------------|--------|------------|--------------|
| 2 oz Bottle | 6221 | 15 | 210 |
| 4 oz Bottle | 6222 | 10 | 270 |

GEL VISCOSITY

Longest assembly time of 30 seconds and an initial cure speed of 20 seconds. It is ideal for gap-filling applications, gluing porous and odd-shaped surfaces and various cabinet making applications, such as pre-bonding moldings to install as one unit.

| size | item # | units/case | cases/pallet |
|-------------|--------|------------|--------------|
| 2 oz Bottle | 6231 | 15 | 210 |
| 4 oz Bottle | 6232 | 10 | 270 |



INSTANT BOND ACCELERATOR

Accelerates the curing of all TITEBOND INSTANT BOND ADHESIVES. It is especially effective for large gaps, very porous woods and bridge bonding joints, bonding acidic surfaces or in low humidity conditions.

- Two convenient application methods
- Heptane-based formula
- Safe on finishes & won't damage plastics

| size | item # | units/case | cases/pallet |
|--------------------|--------|------------|--------------|
| 2 oz Spray Bottle | 6311 | 15 | 210 |
| 5.5 oz Aerosol Can | 6319 | 12 | 180 |



INSTANT BOND ULTIMATE

Provides outstanding bond strength in the form of two formulas; THIN & THICK. Both formulas are strong, durable and great for interior and/or exterior use. Bonds most common materials.

- Versatile performance
- Excellent bond strength
- Interior/Exterior projects

| size | item # | units/case | cases/pallet |
|--------------------------------|--------|------------|--------------|
| 2 Pens per Card 0.176 oz ea | 64240 | 12 | 180 |



TITEWRAP STRETCH CLAMP

Eliminates the need for traditional clamps and secures project while the glue dries. Only adheres to itself and won't damage wood surfaces.

- 700 psi strength & 300% elastic stretch
- Self-bonding – Won't damage wood surface
- Interior/Exterior projects
- Performs in high temperatures

| size | item # | units/case | cases/pallet |
|----------------|--------|------------|--------------|
| 0.75"W x 7.5"L | 16310 | 12 | 100 |



TITEBRUSH GLUE APPLICATOR

A durable glue brush with 100% silicone bristles. Eliminates the need for disposable brushes, fingers and other spreading tools.

- Ideal for woodworking & crafts
- 100% silicone bristles
- Compatible with all types of glues
- Extremely easy to clean

| size | item # | units/case | cases/pallet |
|-------|--------|------------|--------------|
| 9.25" | 16330 | 12 | n/a |